

PVC-U FOOT VALVES - SPRING SERIES

VÁLVULAS DE PIE PVC-U - SERIE MUELLE



Sizes	Solvent cement D16 - D110 (DN10 - DN100) Threaded 3/8" - 4"	
Standards	Solvent socket - Metric, British standard, ASTM, JIS Threaded - BSP, NPT	EN ISO 1452, EN ISO 15493, BS 4346-1, ASTM D 2467, JIS K 6743 ISO 228-1, ASTM D 2464
Working pressure	@ 20°C (73°F) D16-D63 (3/8" - 2"): PN 16 (240 psi) D75 - D110 (2 1/2" - 4"): PN 10 (150 psi)	
Minimum working pressure		
Materials	O-rings: EPDM / FPM	
Characteristics	<ul style="list-style-type: none"> • May be used either vertically and horizontally. • 100% factory tested. • Easy installation and maintenance. • Available in PVC-U. • Resistance to many inorganic chemicals. • Excellent flow characteristics. 	<ul style="list-style-type: none"> • Se pueden usar indistintamente verticalmente o horizontalmente. • Probadas al 100% en fábrica. • Fácil instalación y mantenimiento. • Disponibles en PVC-U. • Resistencia a múltiples sustancias químicas inorgánicas. • Excelentes características de conducción.
Certifications / regulations	Check valve design regulation - ISO 16137:2006	


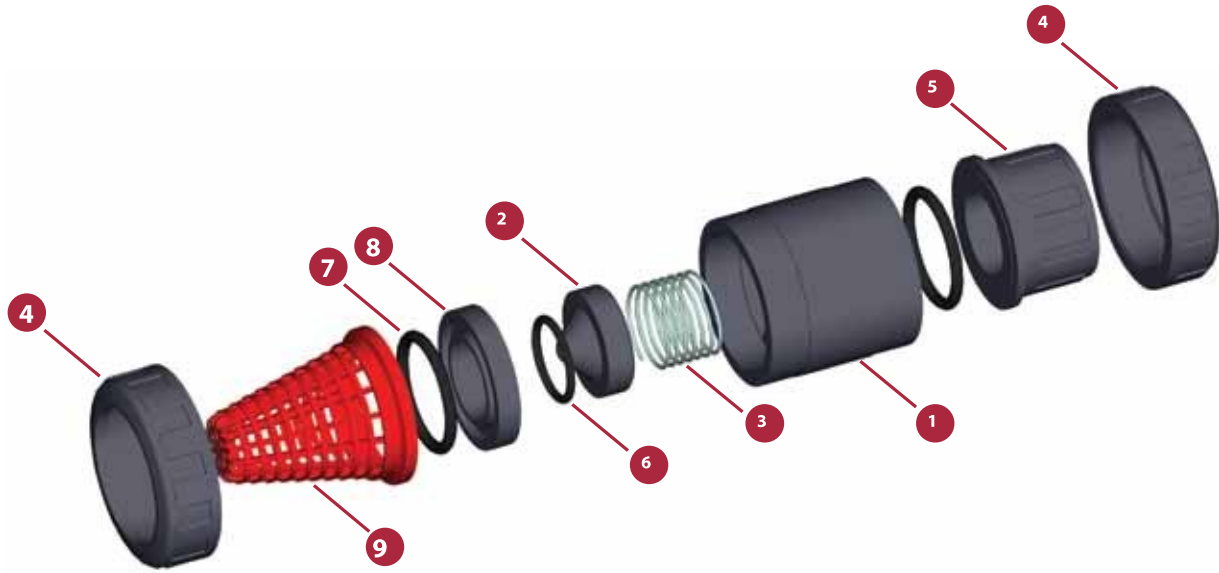


FIG.	Parts	Despiece	Material
1	Body	Cuerpo	PVC-U / PVC-C
2	Cone	Cono de cierre	PVC-U / PVC-C
3	Spring	Muelle	Staniless Steel AISI 302
4	Union nut	Tuerca	PVC-U / PVC-C
5	End connector	Manguito enlace	PVC-U / PVC-C
6	Cone o-ring	Junta cono	EPDM / FPM
7	End connector o-ring	Junta manguito	EPDM / FPM
8	Seal-carrier	Portajuntas	PVC-U / PVC-C
9	Foot valve screen	Rejilla	PP

PRESSURE / TEMPERATURE GRAPH
DIAGRAMA PRESIÓN / TEMPERATURA

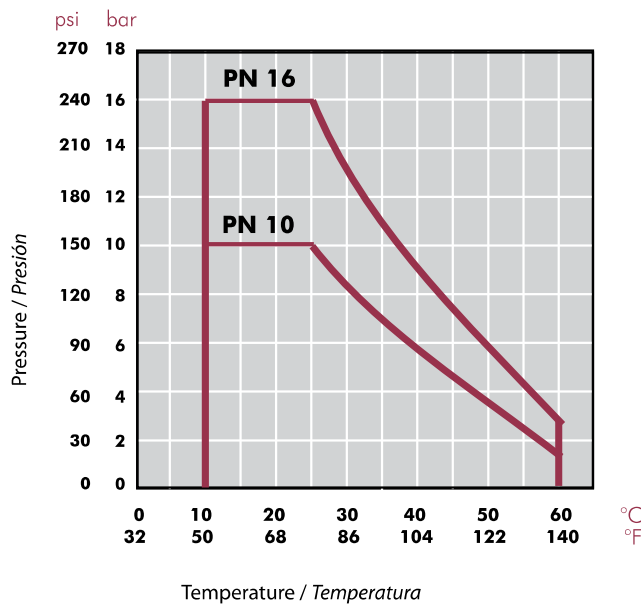

Life: 25 years
 Hydrostatic maximum pressure a component may withstand in continuous service (without overpressure)

Vida útil: 25 años
 Presión hidrostática máxima que un componente es capaz de soportar en servicio continuo (sin sobrepresión)


PRESSURE LOSS DIAGRAM

DIAGRAMA DE PÉRDIDAS DE CARGA

D16 - 3/8"		D20 - 1/2"		D25 - 3/4"		D32 - 1"		D40 - 1 1/4"		D50 - 1 1/2"		D63 - 2"		D75 - 2 1/2"		D90 - 3"		D110 - 4"	
A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
0,42	0,34	0,44	0,34	0,54	0,17	0,35	0,13	3,15	0,13	25,85	0,38	39,80	0,70	50,00	0,40	83,50	0,45	77,2	0,46
0,85	0,52	0,92	0,58	1,06	0,22	1,13	0,18	5,20	0,12	20,70	0,27	34,50	0,48	44,20	0,29	74,80	0,39	67,5	0,36
1,35	0,58	1,60	0,19	1,65	0,15	1,62	0,15	7,35	0,16	17,50	0,19	27,50	0,28	36,50	0,23	64,90	0,31	60,1	0,30
2,08	0,28	2,05	0,18	2,18	0,18	2,02	0,14	9,38	0,21	12,30	0,11	21,15	0,17	30,90	0,20	50,38	0,21	49,6	0,22
2,44	0,34	2,48	0,22	3,21	0,29	2,59	0,14	12,17	0,31	8,86	0,09	12,65	0,09	25,50	0,15	43,08	0,18	41,1	0,18
2,80	0,60	3,10	0,30	3,91	0,38	3,07	0,15	15,05	0,43	3,22	0,09	6,25	0,08	20,35	0,12	35,22	0,14	31,5	0,14
-	-	3,53	0,35	4,32	0,44	3,51	0,16	-	-	-	-	-	-	12,30	0,11	28,75	0,11	24,6	0,13
-	-	-	-	-	-	4,20	0,20	-	-	-	-	-	-	6,27	0,11	18,02	0,08	15,8	0,01
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	8,28	0,11	7,9	0,08
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

A = Flow (m³/h)
Caudal (m³/h)

B = Pressure loss (bar)
Pérdida de carga (bar)

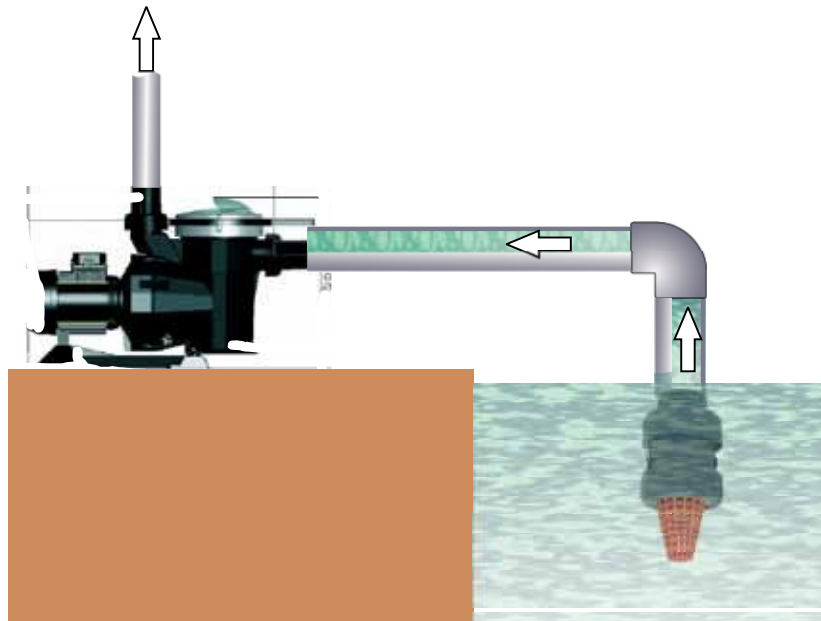

OPENING PRESSURE

PRESIÓN DE APERTURA

Minimum pressure: opening start
Maximum pressure: fully open valve

Presión mínima: inicio apertura
Presión máxima: válvula completamente abierta

D	P (bar) Minimum opening	P (bar) Maximum opening	P (PSI) Minimum opening	P (PSI) Maximum opening
20	0,11	0,19	1,57	2,71
25	0,035	0,067	0,5	0,95
32	0,042	0,077	0,6	1,1
40	0,038	0,069	0,54	0,98
50	0,063	0,088	0,9	1,25
63	0,038	0,060	0,54	0,85
75	0,031	0,060	0,44	0,85
90	0,025	0,060	0,35	0,85